


## Thermally-Enhanced High Power RF LDMOS FET 330 W, 50 V, 746 – 768 MHz

### Description

The PTRA093302FC is a 330-watt LDMOS FET with an asymmetric design intended for use in multi-standard cellular power amplifier applications in the 746 MHz to 768 MHz frequency band. Features include dual-path design, input matching, high gain and thermally-enhanced package with earless flange. Manufactured with Infineon's advanced LDMOS process, this device provides excellent thermal performance and superior reliability.



PTRA093302FC  
Package H-37248-4

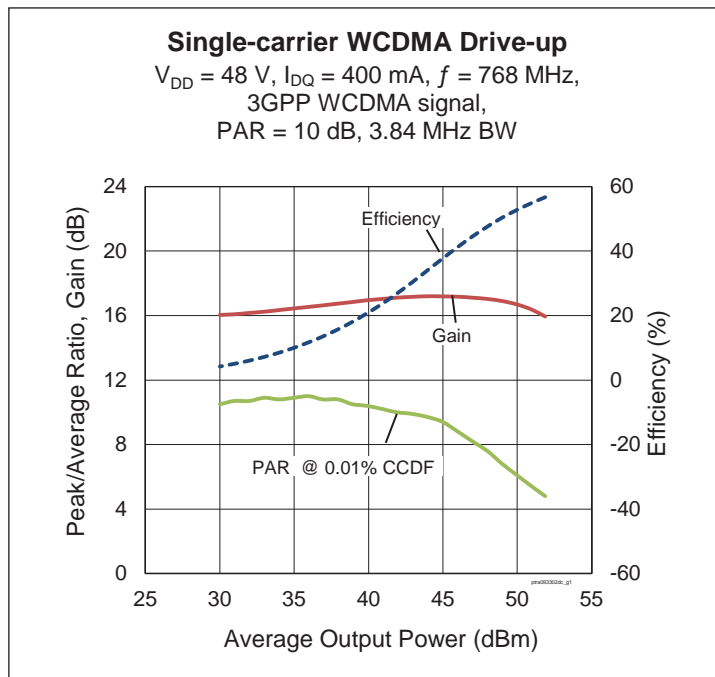

### Features

- Input matched
- Asymmetric Doherty design
  - Main:  $P_{1dB} = 150\text{ W Typ}$
  - Peak:  $P_{1dB} = 175\text{ W Typ}$
- Typical Pulsed CW performance, 746–768 MHz, 48 V, combined outputs
  - Output power at  $P_{1dB} = 200\text{ W}$
  - Efficiency = 54%
  - Gain = 16.5 dB
- Capable of handling 10:1 VSWR @48 V, 79 W (CW) output power
- Integrated ESD protection
- Human Body Model Class 1C (per ANSI/ESDA/ JEDEC JS-001)
- Low thermal resistance
- Pb-free and RoHS-compliant

### RF Characteristics

#### Single-carrier WCDMA Specifications (tested in Infineon Doherty production test fixture)

$V_{DD} = 48\text{ V}$ ,  $I_{DQ} = 400\text{ mA}$ ,  $P_{OUT} = 79\text{ W avg}$ ,  $V_{GS(peak)} = (V_{GS @ I_{DQ} = 400\text{ mA}}) - 3.0\text{ V}$ ,  $f = 768\text{ MHz}$ . 3GPP WCDMA signal: peak/average = 10 dB @ 0.01% CCDF, channel bandwidth = 3.84 MHz.

Characteristic	Symbol	Min	Typ	Max	Unit
Gain	$G_{ps}$	16.0	17.25	—	dB
Drain Efficiency	$\eta_D$	47.0	51.6	—	%
Adjacent Channel Power Ratio	ACPR	—	-32.5	-30.0	dBc

All published data at  $T_{CASE} = 25^\circ\text{C}$  unless otherwise indicated

ESD: Electrostatic discharge sensitive device—observe handling precautions!

**DC Characteristics** (each side)

Characteristic	Conditions	Symbol	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{GS} = 0\text{ V}, I_{DS} = 10\text{ mA}$	$V_{(BR)DSS}$	105	—	—	V
Drain Leakage Current	$V_{DS} = 50\text{ V}, V_{GS} = 0\text{ V}$	$I_{DSS}$	—	—	1	$\mu\text{A}$
	$V_{DS} = 105\text{ V}, V_{GS} = 0\text{ V}$	$I_{DSS}$	—	—	10	$\mu\text{A}$
Gate Leakage Current	$V_{GS} = 10\text{ V}, V_{DS} = 0\text{ V}$	$I_{GSS}$	—	—	1	$\mu\text{A}$
On-State Resistance	(main) $V_{GS} = 10\text{ V}, V_{DS} = 0.1\text{ V}$	$R_{DS(on)}$	—	0.4	—	$\Omega$
	(peak) $V_{GS} = 10\text{ V}, V_{DS} = 0.1\text{ V}$	$R_{DS(on)}$	—	0.3	—	$\Omega$
Operating Gate Voltage	(main) $V_{DS} = 50\text{ V}, I_{DQ} = 400\text{ mA}$	$V_{GS}$	3.1	3.56	4.0	V
	(peak) $V_{DS} = 50\text{ V}, I_{DQ} = 0\text{ mA}$	$V_{GS}$	0.2	0.58	1.0	V





**Maximum Ratings**

Parameter	Symbol	Value	Unit
Drain-Source Voltage	$V_{DSS}$	105	V
Gate-Source Voltage	$V_{GS}$	-6 to +12	V
Junction Temperature	$T_J$	200	$^{\circ}\text{C}$
Storage Temperature Range	$T_{STG}$	-65 to +150	$^{\circ}\text{C}$
Thermal Resistance (main, $T_{CASE} = 70^{\circ}\text{C}, 79\text{ W CW}$ )	$R_{\theta JC}$	0.56	$^{\circ}\text{C/W}$



**Ordering Information**

Type and Version	Order Code	Package Description	Shipping
PTRA093302FC V1 R0	PTRA093302FCV1R0XTMA1	H-37248-4, earless flange	Tape & Reel, 50 pcs
PTRA093302FC V1 R2	PTRA093302FCV1R2XTMA1	H-37248-4, earless flange	Tape & Reel, 250 pcs

**Typical RF Performance** (data taken in production test fixture)

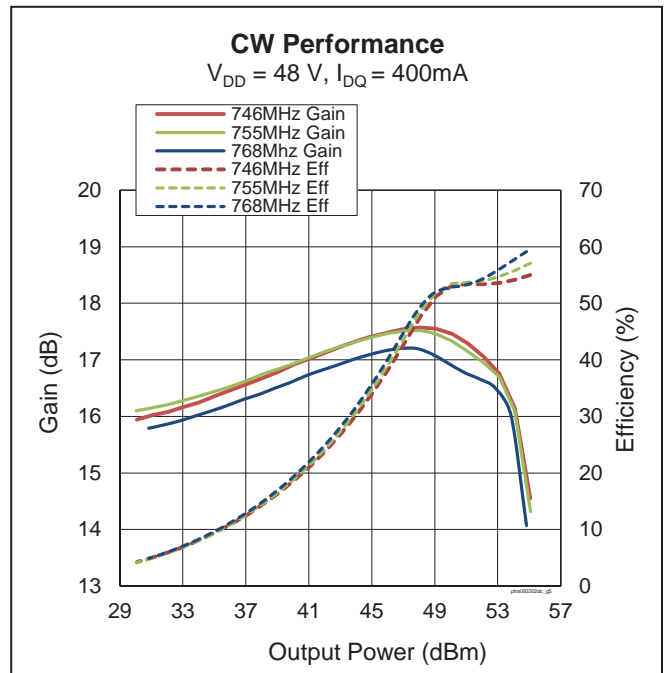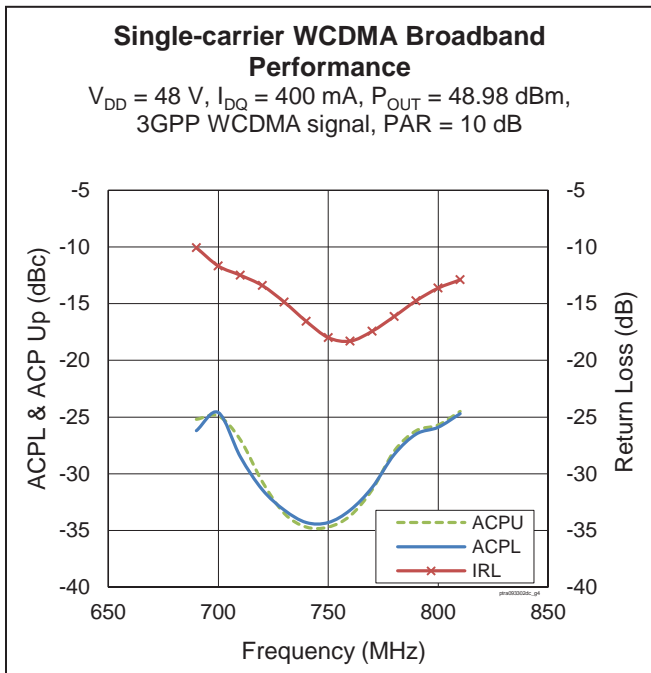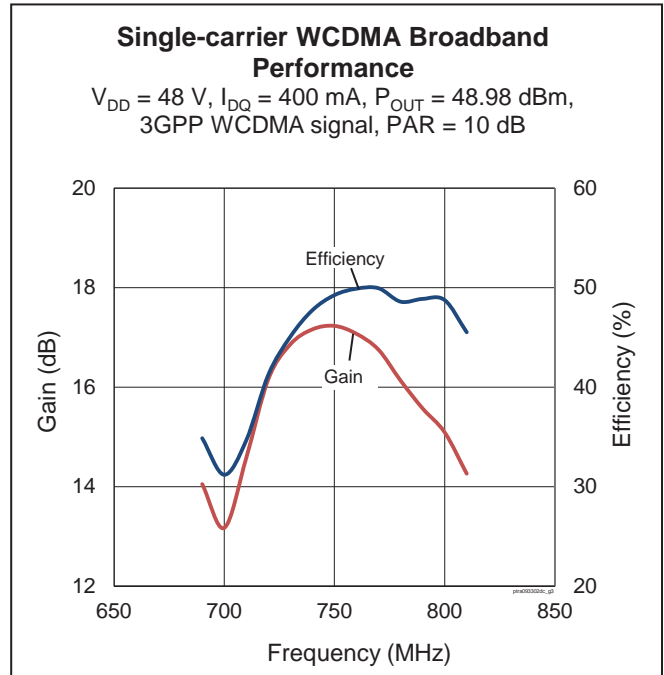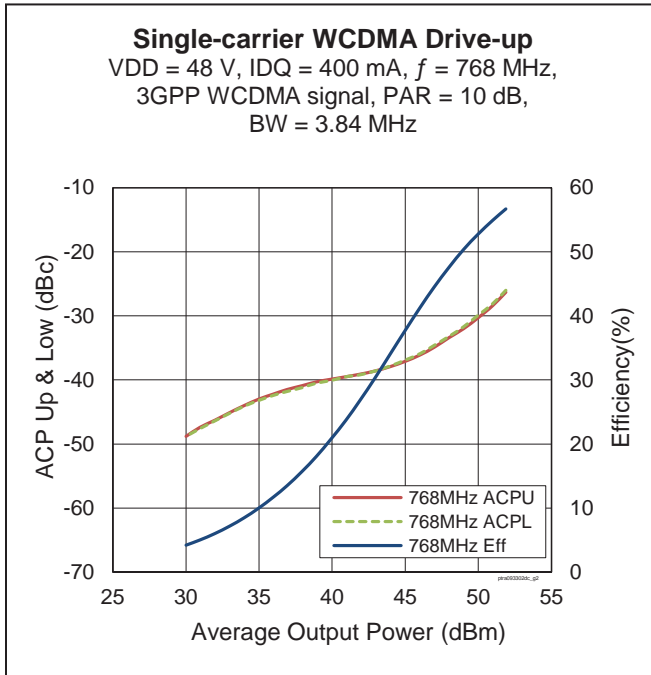

Typical RF Performance (cont.)

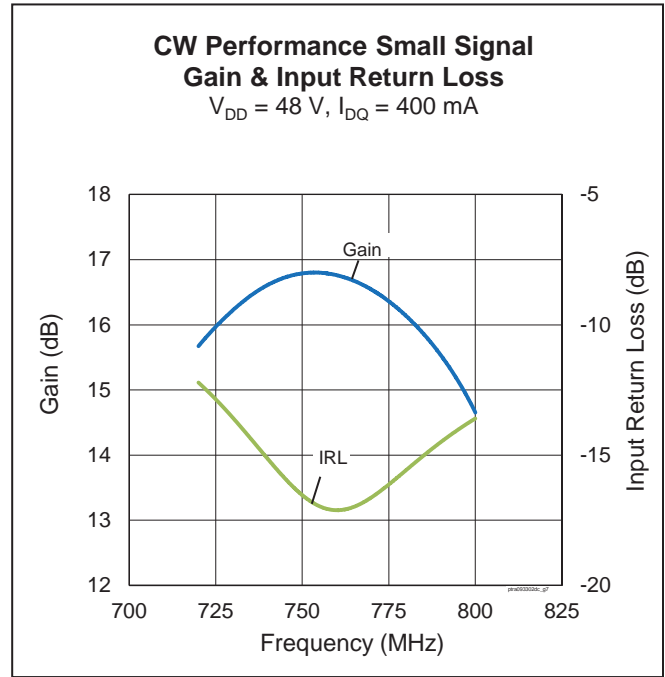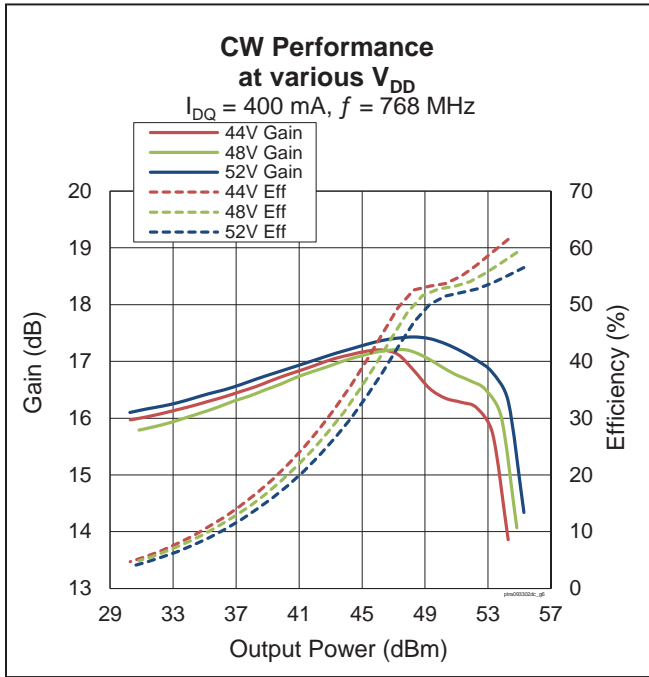

Load Pull Performance


Main Side Load Pull Performance – Pulsed CW signal: 10  $\mu\text{s}$ , 10% duty cycle, 48 V,  $I_{DQ} = 300 \text{ mA}$ , class AB

Freq [MHz]	$Z_s$ [ $\Omega$ ]	$P_{1dB}$					$P_{1dB}$				
		Max Output Power			Max PAE		Max Output Power			Max PAE	
		$Z_l$ [ $\Omega$ ]	Gain [dB]	$P_{OUT}$ [dBm]	$P_{OUT}$ [W]	$\eta_D$ [%]	$Z_l$ [ $\Omega$ ]	Gain [dB]	$P_{OUT}$ [dBm]	$P_{OUT}$ [W]	$\eta_D$ [%]
746	1.72-j4.55	2.68-j0.21	20.45	52.45	176	55.0	2.14+j2.47	22.95	50.52	113	70.0
751	1.85-j4.5	2.22-j0.22	19.88	52.37	173	49.6	2.03+j3.1	23.54	49.57	91	70.6
756	1.91-j4.63	3.66-j0.89	20.24	52.30	170	53.5	2.34+j2.63	22.98	50.42	110	69.9
768	2.1-j4.9	3.49-j0.85	20.13	52.33	171	53.7	2.51+j2.47	22.64	50.64	116	69.6

Peak Side Load Pull Performance – Pulsed CW signal: 10  $\mu\text{s}$ , 10% duty cycle, 48 V,  $V_{GS(PEAK)} = 2.1 \text{ V}$ , class C

Freq [MHz]	$Z_s$ [ $\Omega$ ]	$P_{1dB}$					$P_{1dB}$				
		Max Output Power			Max PAE		Max Output Power			Max PAE	
		$Z_l$ [ $\Omega$ ]	Gain [dB]	$P_{OUT}$ [dBm]	$P_{OUT}$ [W]	$\eta_D$ [%]	$Z_l$ [ $\Omega$ ]	Gain [dB]	$P_{OUT}$ [dBm]	$P_{OUT}$ [W]	$\eta_D$ [%]
746	1.45-j4.42	1.91-j0.19	16.5	53.07	203	54.8	1.85+j2.73	17.60	50.22	105	71.8
751	1.51-j4.50	1.65+j0.04	16.6	53.08	203	55.3	2.18+j2.84	17.62	50.40	110	73.6
756	1.59-j4.59	2.25-j0.56	16.3	52.90	195	53.2	2.00+j2.41	17.51	50.66	116	71.1
768	1.72-j4.94	2.40-j0.76	16.2	52.99	199	53.4	1.75+j3.02	17.27	49.62	92	71.6

Reference Circuit, 746 – 768 MHz

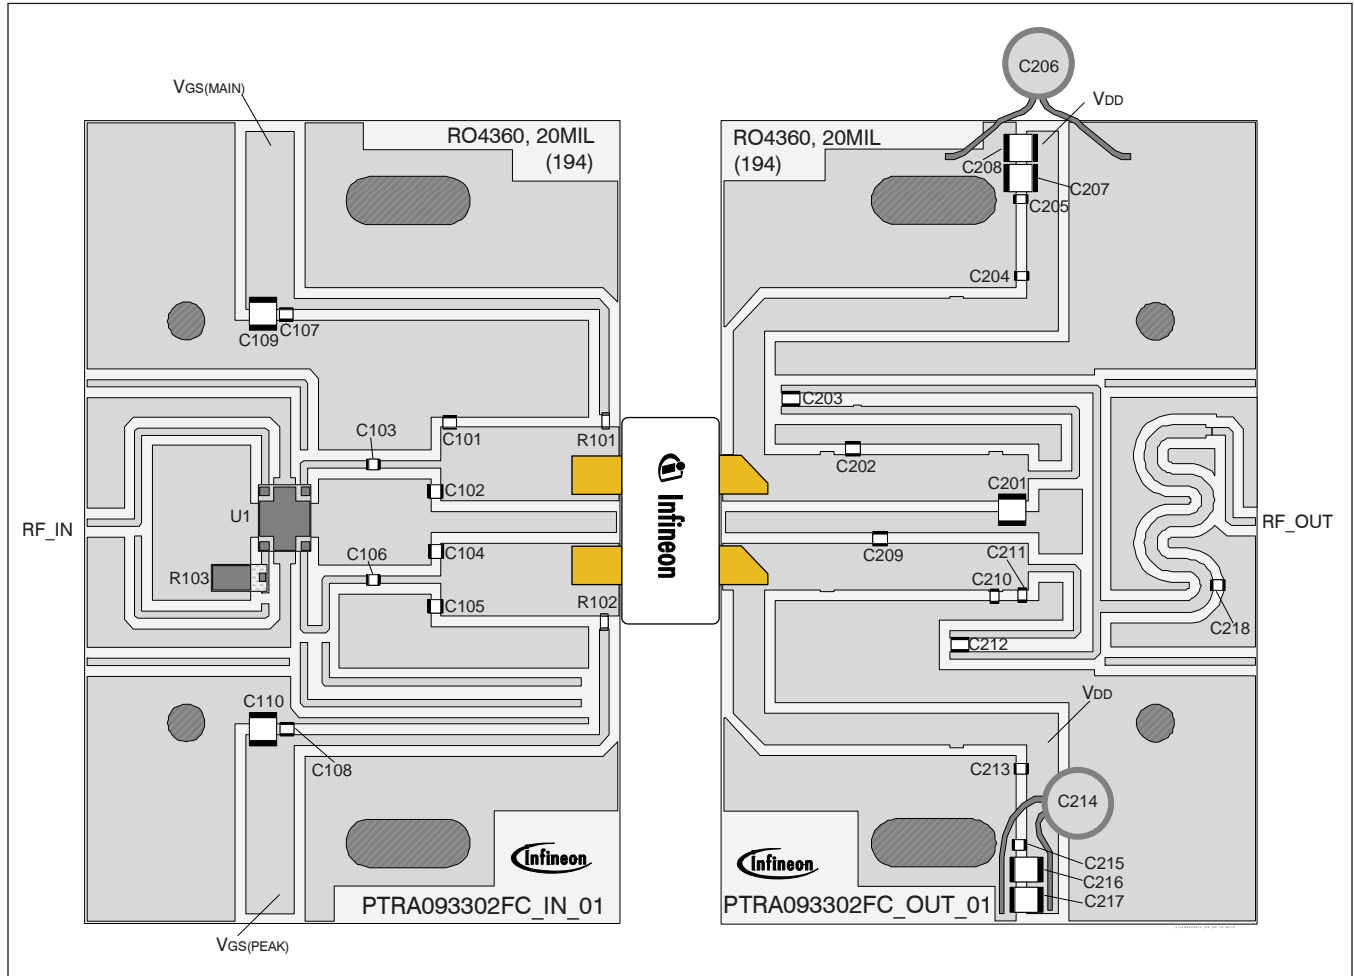

Reference circuit assembly diagram (not to scale)

Reference Circuit Assembly

DUT	PTRA093302FC V1
Test Fixture Part No.	LTA/PTRA093302FC V1
PCB	Rogers 4360, 0.508 mm [0.020"] thick, 2 oz. copper, $\epsilon_r = 6.15$ , $f = 746 - 768$ MHz


Find Gerber files for this test fixture on the Infineon Web site at <http://www.infineon.com/rfpower>

**Reference Circuit** (cont.)

**Components Information for circuit assembly**


Component	Description	Manufacturer	P/N
<b>Input</b>			
C101, C102, C104	Capacitor, 6.8 pF	ATC	ATC100A6R8CW150XB
C103, C106, C107, C108	Capacitor, 68 pF	ATC	ATC100A680JW150XB
C105	Capacitor, 3.9 pF	ATC	ATC800A3R9CW250T
C109, C110	Capacitor, 10 $\mu$ F	Taiyo Yuden	UMK325C7106MM-T
R101, R102	Resistor, 10 $\Omega$	Panasonic Electronic Components	ERJ-3GEYJ100V
R103	Resistor, 50 $\Omega$	Richardson	C16A50Z4
U1	Hybrid Coupler	Anaren	X3C07P1-05S
<b>Output</b>			
C201	Capacitor, 9.1 pF	ATC	ATC100B9R1CW500XB
C202, C209, C210	Capacitor, 6.8 pF	ATC	ATC100A6R8CW150XB
C203, C204, C212, C213	Capacitor, 68 pF	ATC	ATC100A680JW150XB
C205, C215	Capacitor, 56 pF	ATC	ATC100A560JW150XB
C206, C214	Capacitor, 470 $\mu$ F	Cornell Dubilier Electronics (CDE)	SEK471M050ST
C207, C208, C216, C217	Capacitor, 10 $\mu$ F	Taiyo Yuden	UMK325C7106MM-T
C211	Capacitor, 1.1 pF	ATC	ATC800A1R1CW250T
C218	Capacitor, 0.5 pF	ATC	ATC100A0R5CW150XB

**Pinout Diagram** (top view)

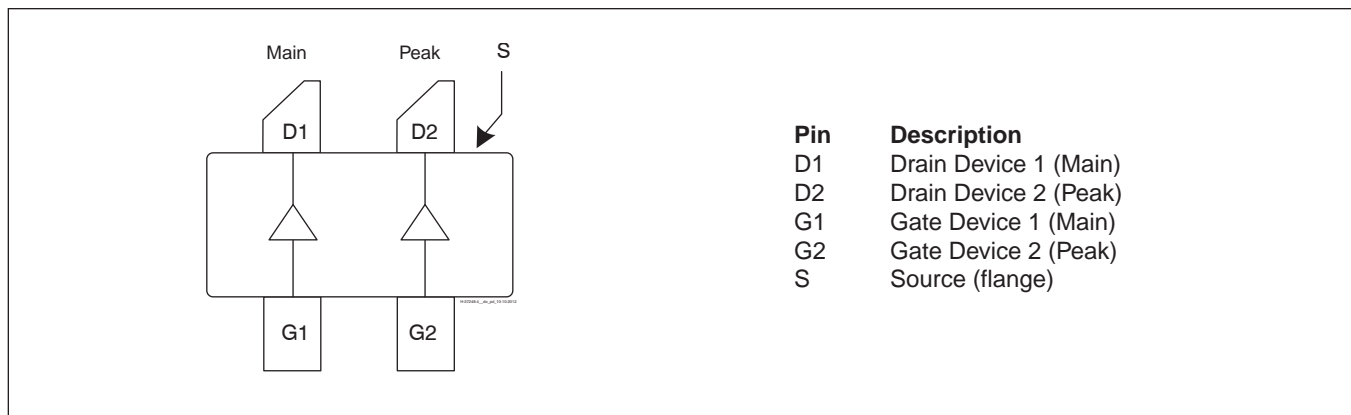

Lead connections for PTRA093302FC

### Package Outline Specifications

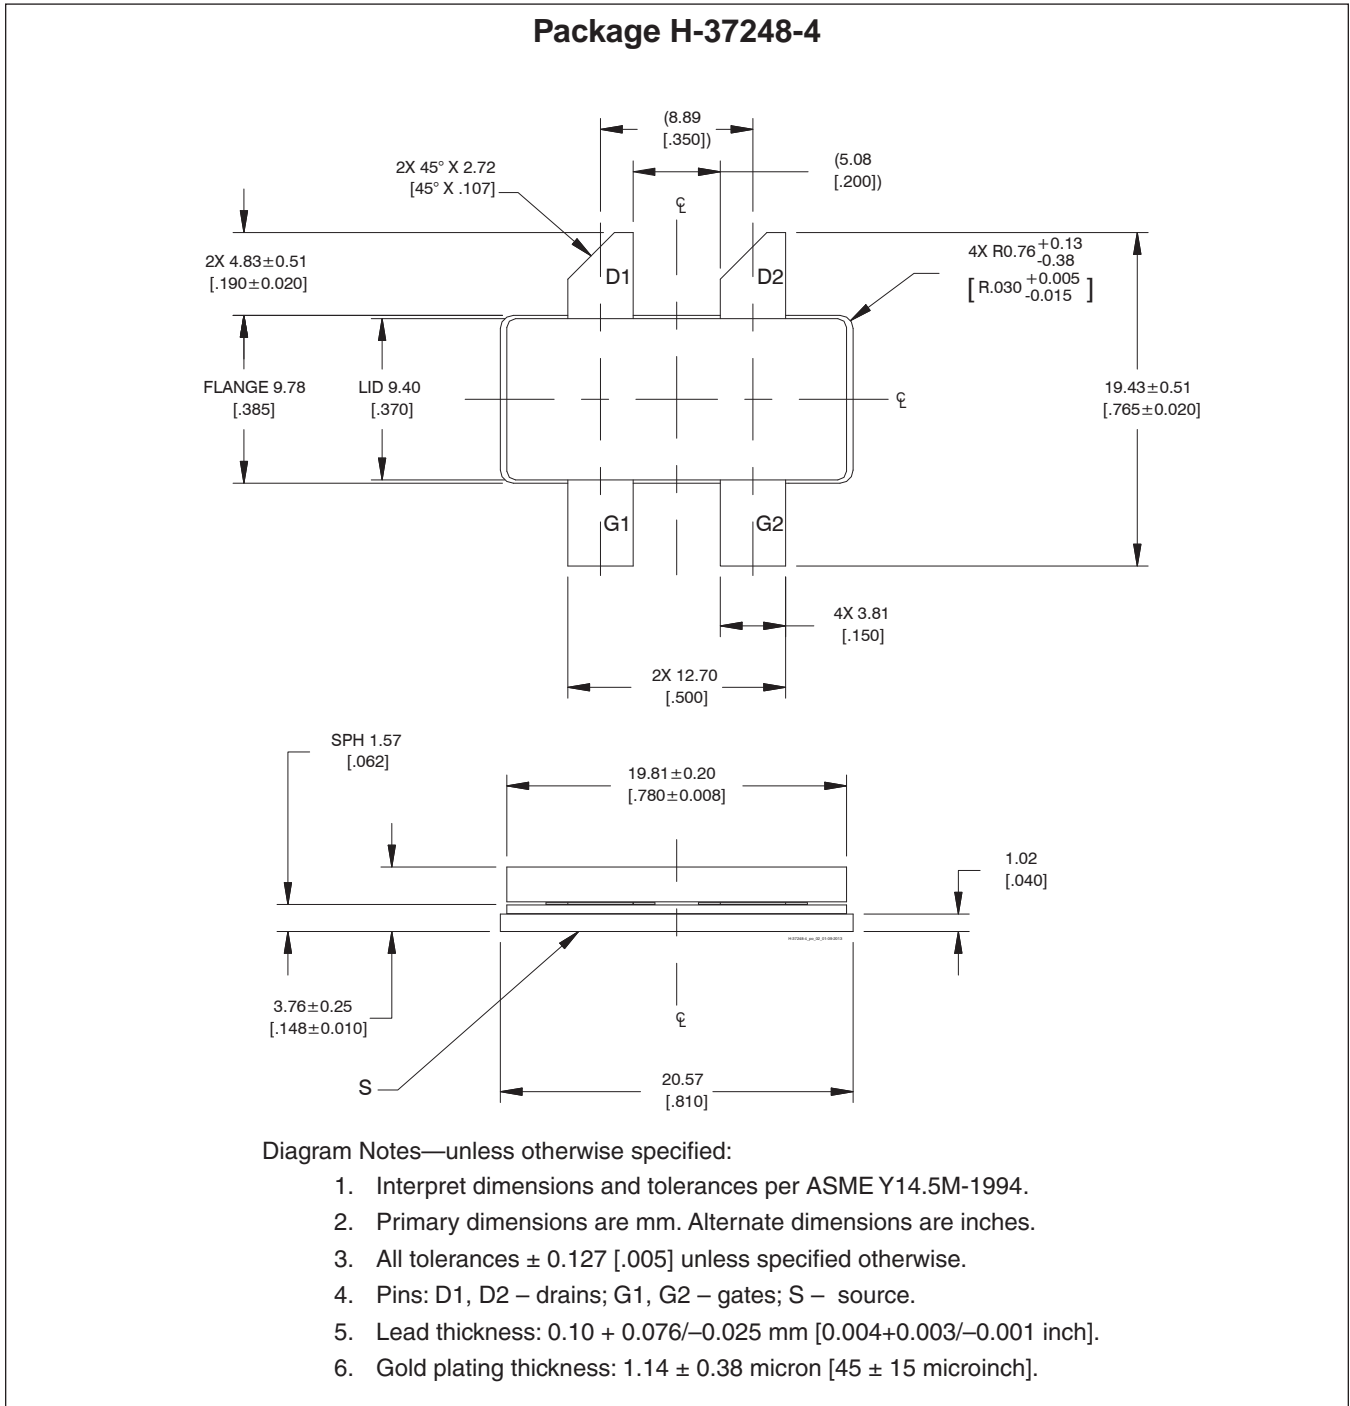

Find the latest and most complete information about products and packaging at the Infineon Internet page <http://www.infineon.com/rfpower>

## Revision History


Revision	Date	Data Sheet Type	Page	Subjects (major changes since last revision)
01	2014-06-19	Advance	All	Data Sheet reflects advance specification for product development
02	2015-10-29	Preliminary	All	Data Sheet reflects preliminary specification
03	2016-03-16	Production	5-6	Add reference circuit information, firm specifications. Product released to production.

### We Listen to Your Comments

Any information within this document that you feel is wrong, unclear or missing at all?  
 Your feedback will help us to continuously improve the quality of this document.  
 Please send your proposal (including a reference to this document) to:

[highpowerRF@infineon.com](mailto:highpowerRF@infineon.com)

To request other information, contact us at:  
 +1 877 465 3667 (1-877-GO-LDMOS) USA  
 or +1 408 776 0600 International



### Edition 2016-03-16

Published by  
**Infineon Technologies AG**  
 85579 Neubiberg, Germany

© 2014 Infineon Technologies AG  
 All Rights Reserved.

### Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

### Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office ([www.infineon.com/rfpower](http://www.infineon.com/rfpower)).

### Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.