

5





4

3

2

1


1:1

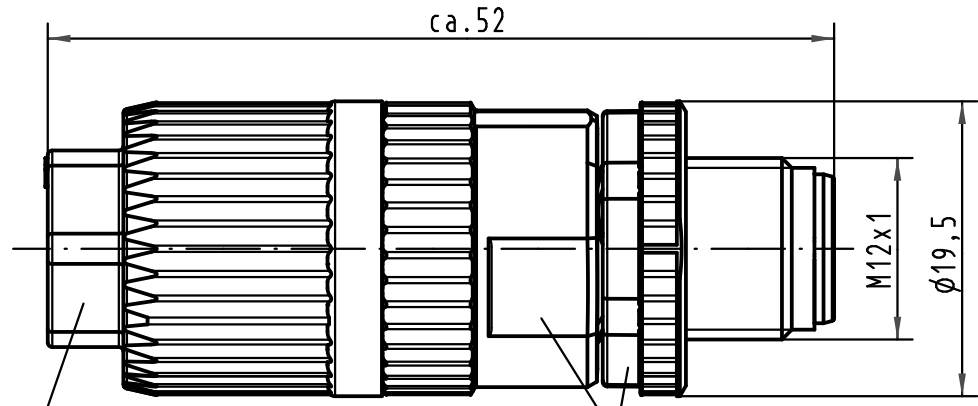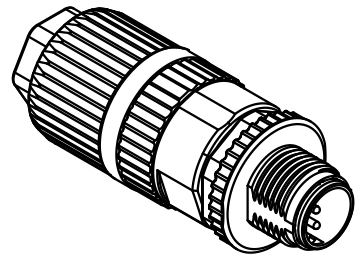

SW13/  
width across flats 13

SW17/  
width across flats 17

Steckgesicht n.  
Contact face acc.  
IEC 61076-2-101



Leiterquerschnitt conductor cross section	0,14 - 0,34mm <sup>2</sup> AWG26-AWG22
Kabeldurchmesser cable outside diameter	7 - 8,8mm beige

All Dimensions in mm Original Size DIN A 4			Techn. Character.			Maßstab/Scale  <b>2:1</b>
ECO1896	18.05.10	DY		Dat.	Name	
413867	13.05.08	DY	Detail.	21.05.03	Grie	
412800	19.03.07	DY	Insp.		Sr	
411606	08.08.05	DY	Stand.			
410925	10.03.04	DY	HARTING Electronics GmbH & Co. KG			
410521			D-32339 ESPELKAMP			
Mod.	Dat.	Name				

Nicht tolerierte Maß/Free size tolerances	
<b>Rundsteckverbinder M12-L/ Circular connector M12-L</b> 3polig Stift B-Kodiert/ 3poles male B-coded	
<b>TB 21 03 241 1300</b>	Blatt/ page /
Sub.	

D

C

B

A