



LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DMN	APVD		
A1		REVISED PER ECR-12-001818	07FEB12	KH	GJ		

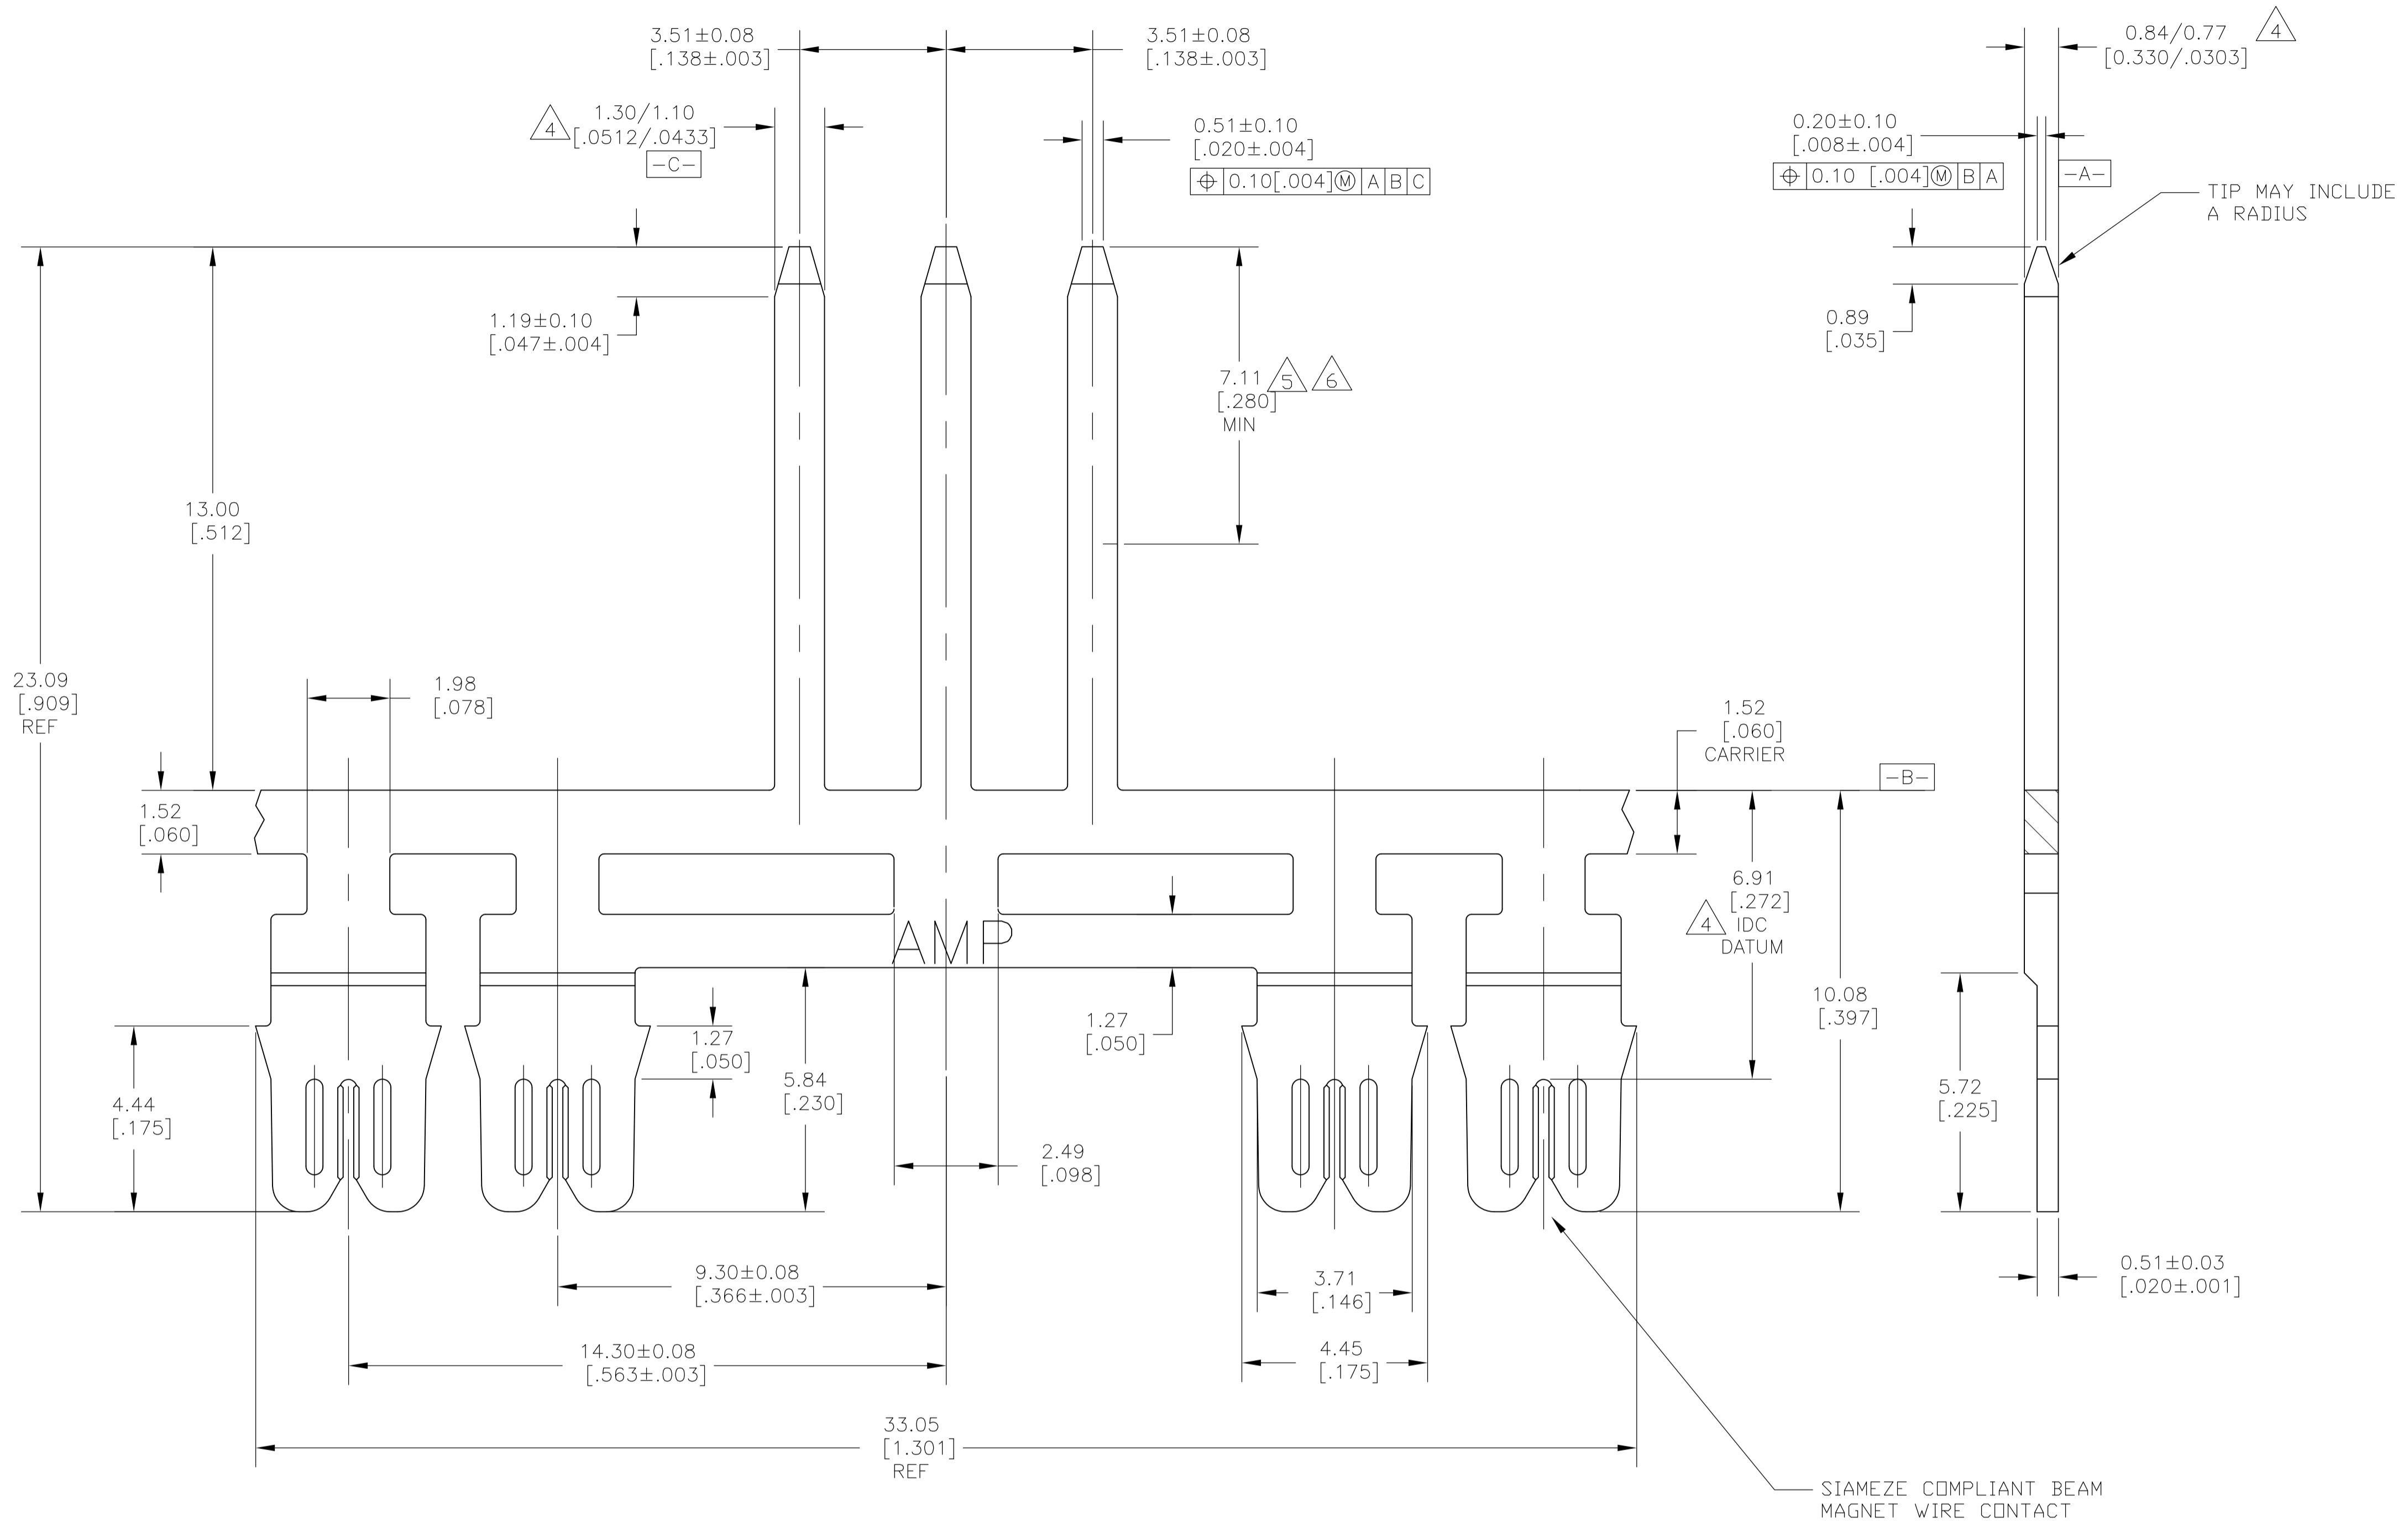

- 1 SPECIFICATIONS: MAGNET WIRE #27.5 AWG 0.34 [.0134] COPPER.
- 2 POCKET RECOMMENDATION: 1601424.
- 3 TERMINAL APPLICATION TO COMPLY WITH TYCO ELECTRONICS SPEC 114-13166, CONSULT TYCO ELECTRONICS PRODUCT ENGINEERING FOR PROPER INSERTION DEPTH INTO THE CAVITIES.
- 4 CHARACTERISTIC REQUIRED ON Q.I.P.
- 5 THIS LENGTH SELECTIVE POST PLATED WITH SILVER 98% PURE PER ASTM B700 1.9-3.3 MICRONS THICK. ENTIRE TERMINAL POST NICKEL PLATED 1.25 MICRONS MIN.
- 6 THIS LENGTH TO HAVE COINED EDGES WITH NO BURRS.
- 7 TERMINALS SUPPLIED CONTINUOUS ON 33.60 [1.323] CENTERS OCCASIONAL BREAKS MAY BE PRESENT.

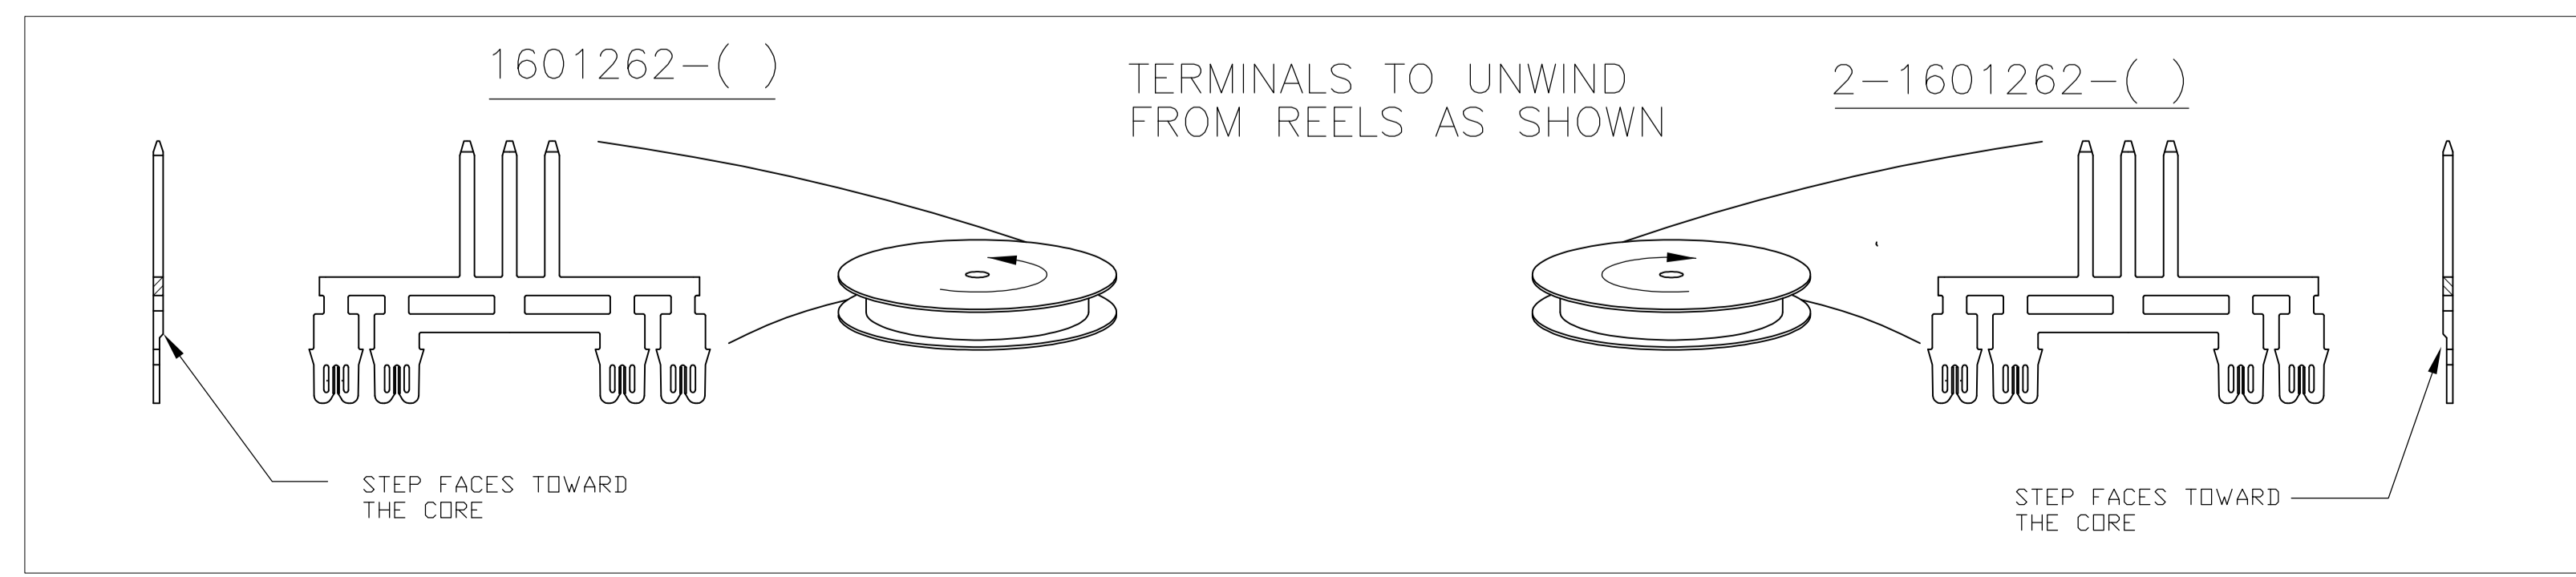

1601262-2
PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN jr_ruth 02FEB11		STE TE Connectivity	
DIMENSIONS: MM [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD GENE JACONO 02FEB11 NAME	
0 PLC ± -		1 PLC ± -		PRODUCT SPEC	
2 PLC ± 0.13 [.005]		3 PLC ± -		APPLICATION SPEC	
4 PLC ± -		ANGLES ± 1°		SIZE CAGE CODE DRAWING NO	
MATERIAL H03 BRASS		FINISH - 5		RESTRICTED TO	
		WEIGHT -		A1 00779 C=1601262	
		CUSTOMER DRAWING		SCALE 10:1 SHEET 1 OF 1 REV A1	