

## Sealing frame - CES-B24-10XSRC-BK - 1411074

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sealing frame with screw locking, size: B24, with 10 pre-mounted coned sleeves for a 2 mm ... 11 mm conductor diameter



### Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	260.0 g
Custom tariff number	39269097
Country of origin	Poland

### Technical data

#### Dimensions

External cable diameter	10x 2 mm ... 11 mm
Length	147 mm
Width	58.5 mm
Height	20 mm

#### Ambient conditions

Degree of protection	IP54 (DIN IEC 60529)
	IP65 (when using a sealing frame directly on the housing panel (perpendicular mounting or underwall mounting) and a 3.6 mm wide cable binder (e.g., item 3240744))
Ambient temperature (operation)	-40 °C ... 120 °C (static)

#### General

Frame type	Sealing frame with coned sleeves
Material	Polyamide (Frame)
	NBR (Coned sleeves)
Color	black
Torque	2 Nm ... 4 Nm (Locking screw)

# Sealing frame - CES-B24-10XSRC-BK - 1411074

## Technical data

### General

Installation instructions	M4 locking screw with 3 mm hex socket head, torque 2 ... 4 Nm
	Leak-tightness is guaranteed with underwall and perpendicular mounting; the CES-B24-WRG-BK flat gasket (supplied as standard) should be inserted between the wall and the sealing frame in the case of wall mounting.

## Classifications

### eCl@ss


eCl@ss 5.1	23110102
eCl@ss 6.0	23110102
eCl@ss 8.0	27142421

### ETIM

ETIM 4.0	EC000886
ETIM 5.0	EC000211


## Drawings

Dimensional drawing

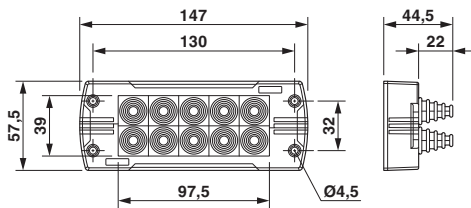

Dimensional drawing

Dimensional drawing



Panel cutout