

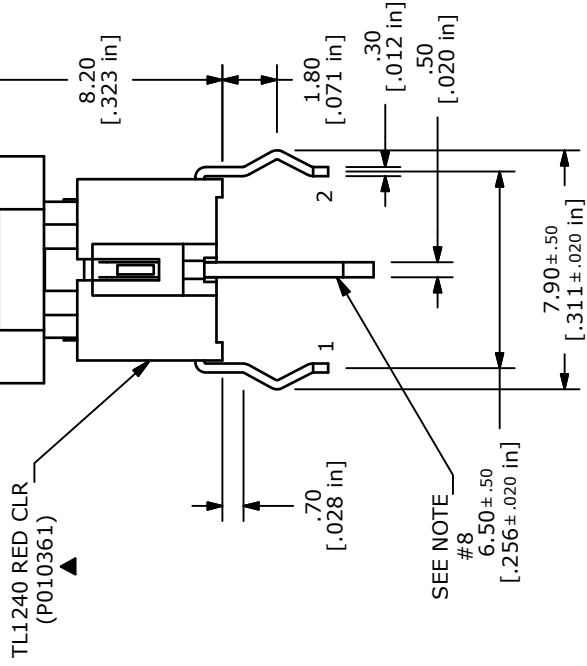


P.C.B. LAYOUT


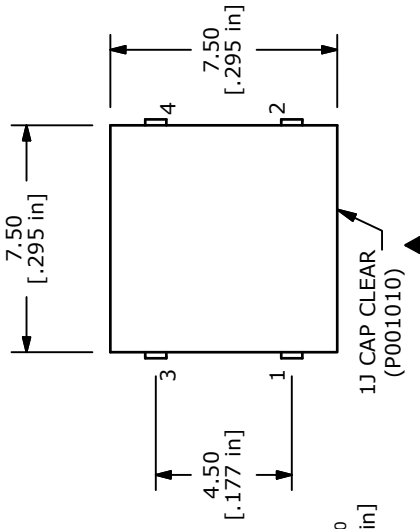


TL1240 RED CLR (P010361)



CIRCUIT: SPST

- NOTES:
1. ALL DIMENSIONS IN MM
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. RATING: 50mA @ 12VDC
 4. TRAVEL: 0.25 +0.2/0.1mm
 5. OPERATING FORCE: 160±50gf
 6. CONTACT RESISTANCE: 100 Milli-Ohms Max
 7. 2002/95/EC (ROHS) COMPLIANT
 8. SHORTER LEAD (WITH COLOR) IS NEGATIVE (CATHODE).
 9. ▲ DENOTES CRITICAL PARAMETER

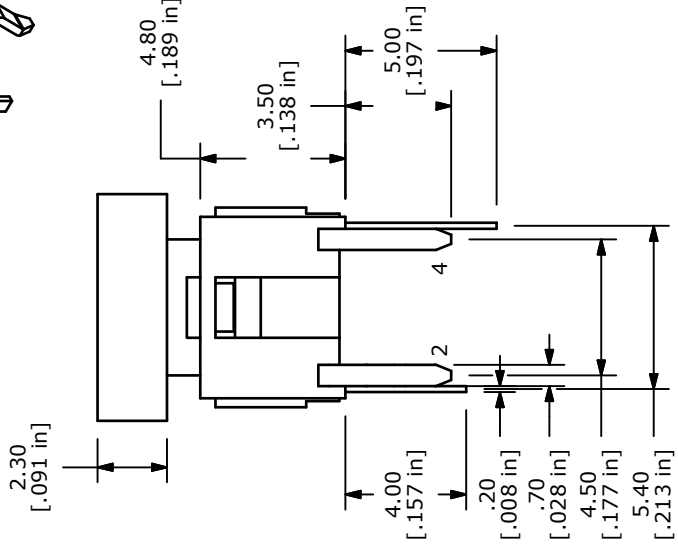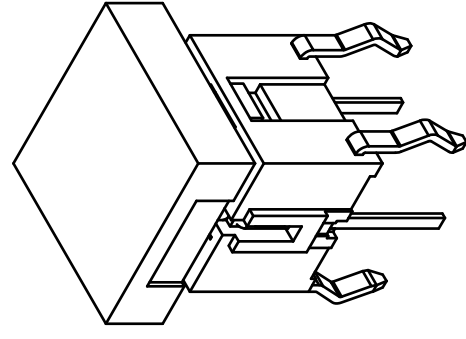

LED SPECS	UNITS	RED
FORWARD CURRENT	mA	20
FORWARD VOLTAGE	V	1.8-2.5
LUMINOUS INTENSITY	MCD	150



TITLE TL1240RQ1JCLR

REV	PCR NO	DESCRIPTION	DATE	BY
C	19550	DRAWING UPDATE / CLEAN-UP	12/28/10	BGL

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 4:1

DATE 12/28/2010

DR BGL

DWG XP0131P

REV C