

4

3

2

1

D

D

C




C

B

B

A

A

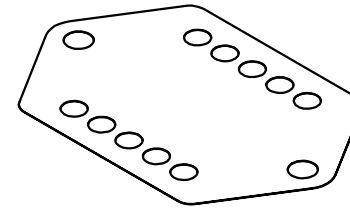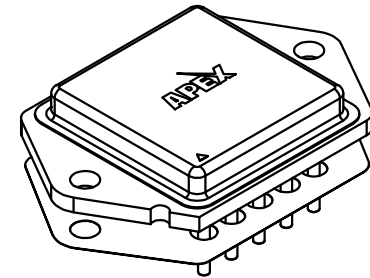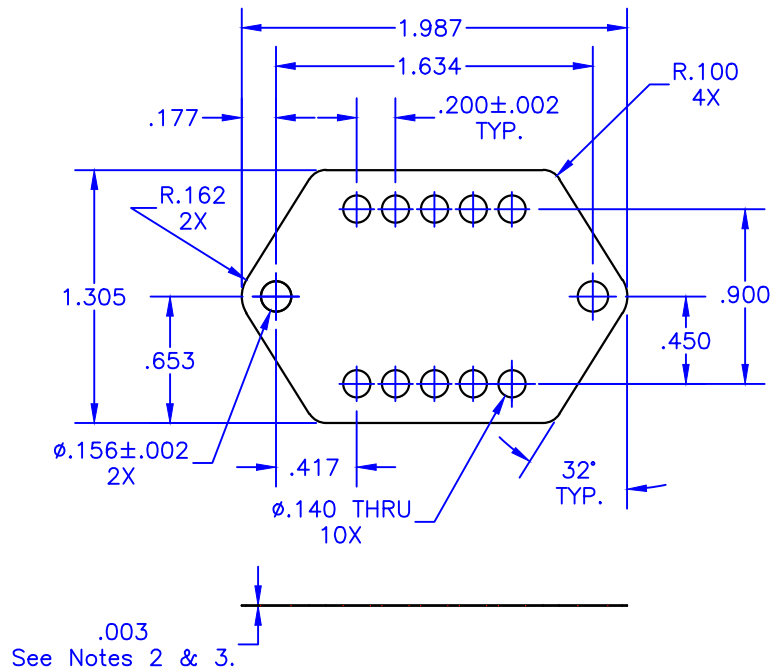

### NOTES:

1. Unless otherwise noted, all dimensions are in inches.
2. Foil Material: .002 thick 1145 aluminum
3. Interface Material: .0005 thick phase-change thermal compound, both sides.  
Maximum shipping & storage temperature - 40°C  
Reflow temperature - 60°C  
Maximum recommended service temperature - 200°C
4. Thermal impedance: .030 °C/W-in<sup>2</sup> (.194 °C/W-cm<sup>2</sup>) @ 20psi
5. Used with 10-pin Power DIP package (Apex designator: DE).

TOLERANCES - UNLESS OTHERWISE SPECIFIED
.XX = ±.01 [.254]
.XXX = ±.005 [.127]
ANG. = ±5°



TITLE: THERMAL WASHER, P-DIP		MODEL: TW10	
SUBJECT: MECHANICAL DRAWING			
ENGINEER: K.GOPP	DRAWN BY: J.FAY	DCA: 16270	SH. 1 OF 1

FILENAME: TW10	REV: I	DATE: 11JUL16
----------------	--------	---------------

4

3

2

1