



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
08/14/04	A	1. ADDED DIM. FOR NO COMPONENTS AREA 2. QUANTITY 450 WAS 500	T.B.	B.S.	
10/02/04	B	1. REVISED BATTERY HOLDER VIEW TO MEET ACTUAL SAMPLE	T.B.	B.S.	

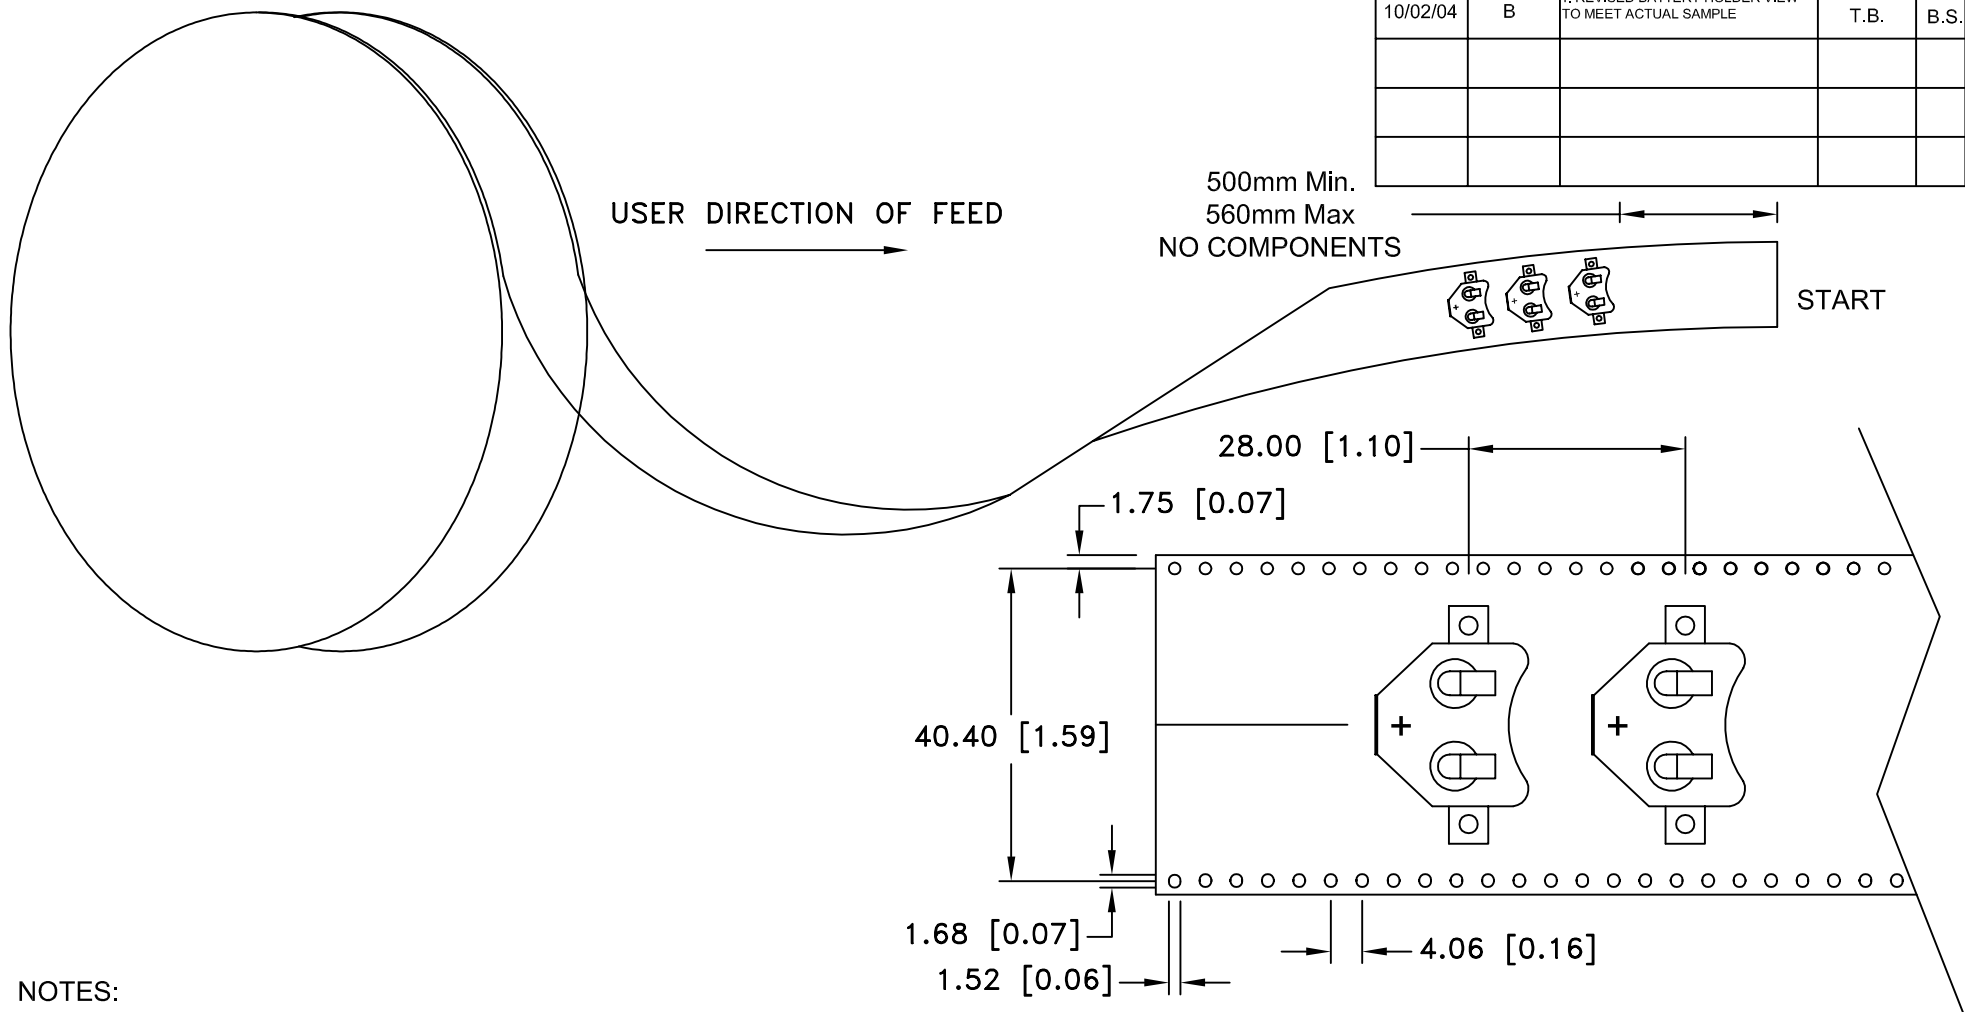

- NOTES:
1. 10 Sprocket hole pitch cumulative tolerance $\pm 0.20\text{mm}$
 2. Carrier camber not to exceed 1mm in 250mm
 3. Material: Black Conductive Polystyrene
 4. Thickness: $0.35 \pm 0.05\text{mm}$
 5. Component loader per 13" reel: 450 pcs
 6. All dimensions per EIA-481-2A

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal $\pm .5$ (.020)		Scale	Drawn By B.S. Approved By T.B.
Fractional $\pm .8$ (.030)	Title TAPE AND REEL SPECIFICATION FOR SURFACE MOUNT BATTERY HOLDER FOR BK-883		
Angular $\pm 3^\circ$	Date 10/02/04	Drawing Number BK-883-TR-REEL	