


REV.	DATE
NC	08/10/99

DESCRIPTION
INITIAL RELEASE

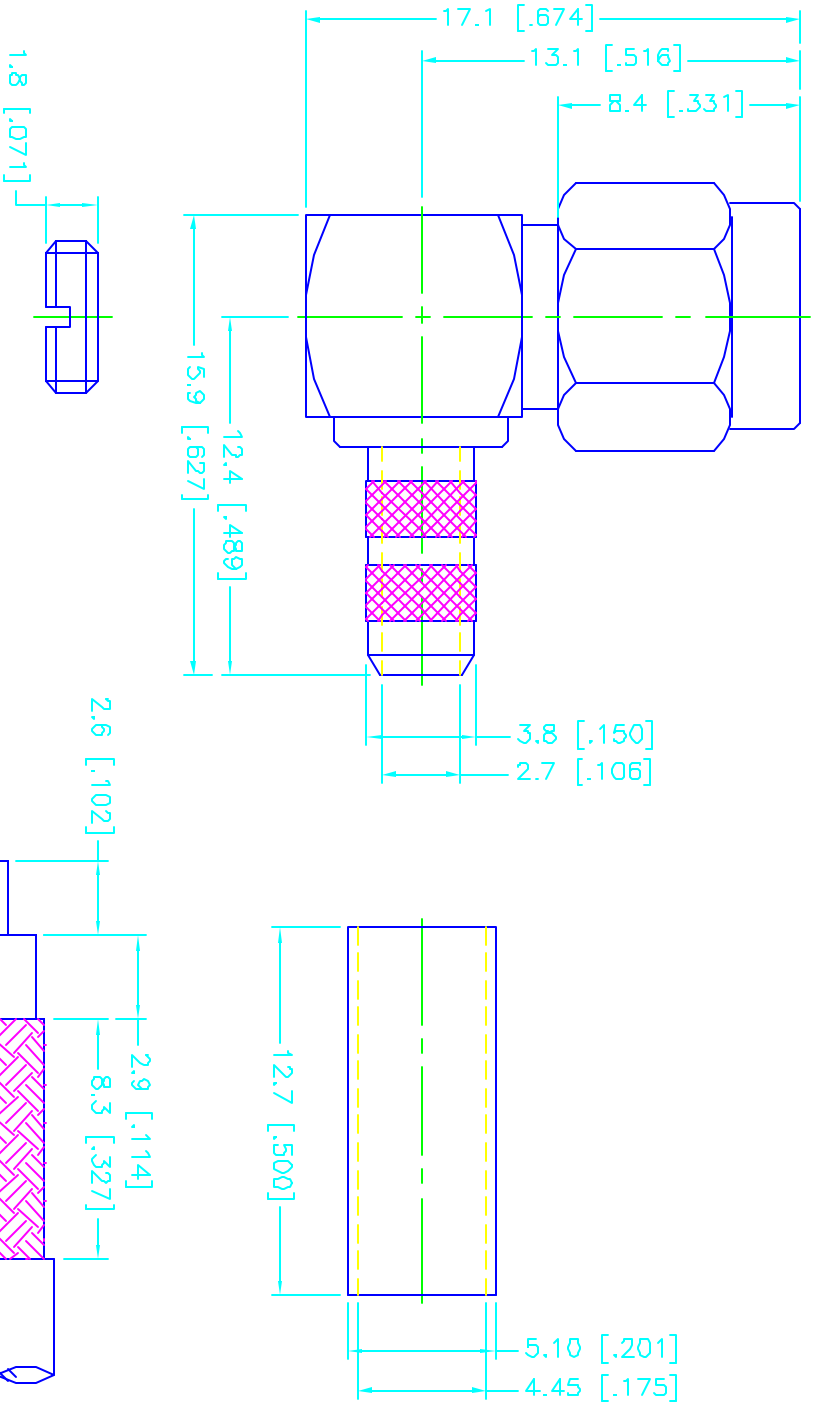

RECOMMENDED
CABLE STRIPPING DIM'S

DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS FOR CUSTOMER REFERENCE ONLY	APPROVALS	DATE	TITLE	SCALE	PART NO.	SHEET
1 BODY	BRASS	GOLD	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5-6 ± 0.2 6-30 ± 0.4 30-120 ± 0.6 120-375 ± 1 375-1000 ± 1.6 1000-2000 ± 2.4	DRAWN	08/10/99	SMA R/A CRIMP PLUG Connector Corporation (FOR RG-180B/U, 195/U, B8218, B1835, B1865)	NA	1 322272	1 OF 1
2 INSULATOR	TEFLON	NATURAL		CHECKED					
3 CONTACT PIN	BRASS	GOLD		ISSUED					
4 COVER	BRASS	GOLD							
5 FERRULE	COPPER	GOLD							
6									
7									
8				DO NOT SCALE DRAWING					



Connector Corporation

SMA R/A CRIMP PLUG
(FOR RG-180B/U, 195/U, B8218, B1835, B1865)

SIZE: A
 FSCM NO.: 99001
 DWG. NO.: 1 322272.DWG
 REV.: NC