


NOTES:
 CRIMPING:
 USE CRIMP TOOL: 360X10409X
 WITH TOOL INSERT: 360X20029X
 SELECTOR SETTINGS: 5 FOR AWG 12
 4 FOR AWG 14

STRIPPING DIMENSIONS

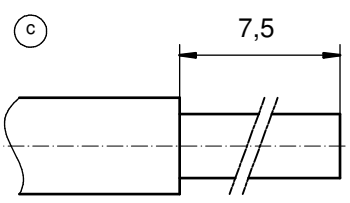

Directive 2002/95/EC RoHS compliant

item	quantity	part description	material	plating
3	1	REAR SIDE	COPPER ALLOY	GOLD FLASH over NICKEL
2	1	RETAINING RING	COPPER ALLOY	NICKEL PLATED
1	1	MATING SIDE	COPPER ALLOY	min. 30µin HARD GOLD over min. 50µin NICKEL

partlist					tolerance	dim. in mm	scale:	
					ISO 2768-m		5:1	
					date	name	material:	
					drawn	Schmidt	see partlist	
					appd.	Koch	title:	
					norm		HIGH POWER CONTACT MALE	
					5 x c	Ä4115	27.09.201	CRIMP VERSION 20A / AWG 12-14 PREMATING
					2 x b	Ä3728	23.08.2010	D-SUB COMBINATION
					a	Original		dwg no: Inventor 10
					rev.	description	date	name
					CONEC			DIN-A3
								part no: 13K1A590
								part no: 131C11129X

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH
 DO NOT ALTER CAD DRAWING BY HAND