January 16, 1998

TEL:805-498-2111 FAX:805-498-3804 WEB:http://www.semtech.com

SUPERFAST RECOVERY, LOW CURRENT 3-PHASE FULL WAVE BRIDGE RECTIFIER ASSEMBLIES

- Low forward voltage drop
- Low reverse leakage current
- Aluminum case
- Low thermal impedance
- Very fast reverse recovery time

QUICK REFERENCE DATA


- $V_R = 50V 150V$
- $I_F = 5.0A$
- $V_F = 1.2V$
- $t_{rr} = 30 nS$

ABSOLUTE MAXIMUM RATINGS

Device Type	Working Reverse Voltage V _{RWM}	Average Rectified Current I _{F(AV)}						1 Cycle Surge Current	
		@ case temperature			@ ambient temperature			I _{FSM} @ t _p = 8.3mS	
		@ 55°C	@ 100°C	@ 125°C	@ 25°C	@ 55°C	@ 100°C	@ 25°C	@ 100°C
	Volts	Amps	Amps	Amps	Amps	Amps	Amps	Amps	Amps
SC3BJ05FF	50								
SC3BJ10FF	100	5.0	3.1	1.8	1.5	1.1	0.7	35	24
SC3BJ15FF	150								

 $R_{\theta JC} = 6.0^{\circ} C/W$

MECHANICAL

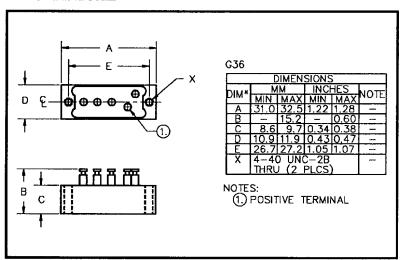



January 16, 1998

ELECTRICAL CHARACTERISTICS

Device	Leakage	n Reverse Current V _{RWM}	Maximum Forward Voltage / leg Vr @ 1.5A	Maximum Reverse Recovery Time	Maximum operating & storage temp range. Tor Tstg	
Type	@ 25°C	@ 100°C	0 25°C	t _{rr} @ 25°C		
	μΑ	μA	Volts	nS	°C	
SC3BJ05FF					- 55	
SC3BJ10FF	3.0	150	1.2	30	to	
SC3BJ15FF					+150	

Measured on discrete devices prior to assembly

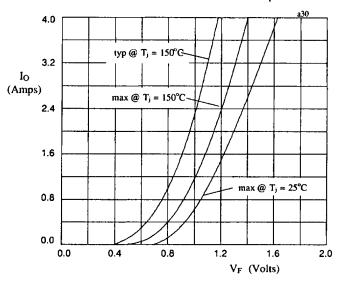



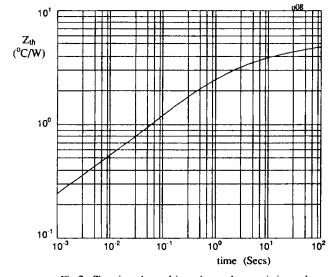


Fig 2. Transient thermal impedance characteristic per leg

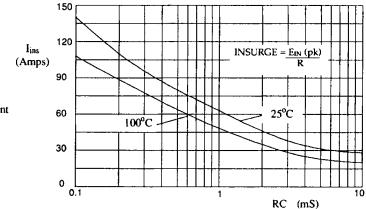


Fig 3. Maximum insurge current against time constant for capacitive loads.