



0.4-Ω Low-Voltage Dual SPDT Analog Switch

DESCRIPTION

The DG2531/DG2532 is a sub 1- Ω (0.4 Ω at 2.7 V) dual SPDT analog switches designed for low voltage applications.

The DG2531/DG2532 has on-resistance matching (less than 0.05 Ω at 2.7 V) and flatness (less than 0.2 Ω at 2.7 V) that are guaranteed over the entire voltage range. Additionally, low logic thresholds makes the DG2531/DG2532 an ideal interface to low voltage DSP control signals.

The DG2531/DG2532 has fast switching speed (on/off time at 40 and 35 ns) with break-before-make guaranteed. In the On condition, all switching elements conduct equally in both directions. Off-isolation and crosstalk is - 69 dB at 100 kHz.

The DG2531/DG2532 is built on Vishay Siliconix's high-density low voltage CMOS process. An eptiaxial layer is built in to prevent latchup. The DG2531/DG2532 contains the additional benefit of 2000 V ESD protection.

Packaged in space saving MSOP-10, the DG2531/DG2532 is a high performance, low r_{ON} switches for battery powered applications.

FEATURES

- Low Voltage Operation (1.8 V to 5.5 V)
- Low On-Resistance r_{ON} : 0.4 Ω at 2.7 V
- 69 dB OIRR at 2.7 V, 100 kHz
- MSOP-10 Package
- ESD Protection > 2000 V


BENEFITS

- Reduced Power Consumption
- High Accuracy
- · Reduce Board Space
- 1.6 V Logic Compatible
- · High Bandwidth

APPLICATIONS

- · Cellular Phones
- · Speaker Headset Switching
- · Audio and Video Signal Routing
- PCMCIA Cards
- · Battery Operated Systems
- · Relay Replacement

FUNCTIONAL BLOCK DIAGRAM AND PIN CONFIGURATION



Top View

DG2 MSO		
1 2 3	10 9 8 8	NC2 COM2 IN2 NO2

GND

6

TRUTH TABLE					
Logic	NC1 and NC2	NO1 and NO2			
0	ON	OFF			
1	OFF	ON			

ORDERING INFORMATION				
Temp Range	Package	Part Number		
- 40 to 85 °C	MSOP-10	DG2531DQ-T1-E3 DG2532DQ-T1-E3		

Document Number: 72742 S-71009–Rev. C, 14-May-07

NC1 COM1

NO₁

DG2531/DG2532

Vishay Siliconix



ABSOLUTE MAXIMUM RATINGS						
Parameter		Limit	Unit			
Reference V+ to GND		- 0.3 to + 6	V			
IN, COM, NC, NO ^a		- 0.3 to (V+ + 0.3)	V			
Continuous Current (NO, NC, COM)		± 300	mA			
Peak Current (Pulsed at 1 ms, 10 % duty cycle)		± 500	ША			
Storage Temperature	(D Suffix)	- 65 to 150	°C			
PESD per Method 3015.7		> 2	kV			
Power Dissipation (Packages) ^b	MSOP-10 ^c	320	mW			

- a. Signals on NC, NO, or COM or IN exceeding V+ will be clamped by internal diodes. Limit forward diode current to maximum current ratings. b. All leads welded or soldered to PC Board. c. Derate 4.0 mW/°C above 70 °C.

SPECIFICATIONS (V+ = 3 V)							
		Test Conditions Otherwise Unless Specified	Limits - 40 to 85 °C		°C		
Parameter	Symbol	$V+ = 3 V$, $\pm 10 \%$, $V_{IN} = 0.5 V$ or 1.4 V^e	Temp ^a	Min ^b	Typ ^c	Max ^b	Unit
Analog Switch							
Analog Signal Range ^d	V_{NO}, V_{NC}, V_{COM}		Full	0		V+	٧
On-Resistance	r _{ON}		Room Full		0.4	0.6 0.7	
r _{ON} Flatness ^d	r _{ON} Flatness	$V+ = 2.7 \text{ V}, V_{COM} = 0.6 \text{ V}/1.5 \text{ V}$ $I_{NO}, I_{NC} = 100 \text{ mA}$	Room		0.12	0.2	Ω
On-Resistance Match Between Channels ^d	$\Delta r_{DS(on)}$		Room			0.05	
Switch Off Leakage Current	I _{NO(off)} I _{NC(off)}	$V_{\text{H}} = 3.3 \text{ V},$ $V_{\text{NO}}, V_{\text{NC}} = 0.3 \text{ V/3 V}, V_{\text{COM}} = 3 \text{ V/0.3 V}$	Room Full	- 1 - 10		1 10	nA
	I _{COM(off)}		Room Full	- 1 - 10		1 10	
Channel-On Leakage Current	I _{COM(on)}	$V+ = 3.3 \text{ V}, V_{NO}, V_{NC} = V_{COM} = 0.3 \text{ V/3 V}$	Room Full	- 1 - 10		1 10	
Digital Control							
Input High Voltage ^d	V _{INH}		Full	1.4			- V
Input Low Voltage	V _{INL}		Full			0.5	
Input Capacitance	C _{in}		Full		7		pF
Input Current	I _{INL} or I _{INH}	V _{IN} = 0 or V+	Full	1		1	μΑ



Vishay Siliconix


SPECIFICATIONS (V+ = 3 V)							
		Test Conditions Otherwise Unless Specified		Limits - 40 to 85 °C		°C	
Parameter	Symbol	$V+ = 3 V, \pm 10 \%, V_{IN} = 0.5 V \text{ or } 1.4 V^{e}$	Temp ^a	Min ^b	Typ ^c	Max ^b	Unit
Dynamic Characteristics							
Turn-On Time	t _{ON}	V_{NO} or V_{NC} = 2.0 V, R_L = 50 Ω , C_L = 35 pF	Room Full		40	70 77	
Turn-Off Time	t _{OFF}		Room Full		35	65 72	ns
Break-Before-Make Time	t _d		Room	1	4		
Charge Injection ^d	Q _{INJ}	$C_L = 1 \text{ nF, } V_{GEN} = 1.5 \text{ V, } R_{GEN} = 0 \Omega$	Room		54		рC
Off-Isolation ^d	OIRR	R_L = 50 Ω, C_L = 5 pF, f = 100 kHz	Room		- 69		dB
Crosstalk ^d	X _{TALK}		Room		- 69		ub.
N _O , N _C Off Capacitance ^d	$C_{NO(off)}$ $C_{NC(off)}$	V _{IN} = 0 or V+, f = 1 MHz	Room		143		pF
Channel-On Capacitance ^d	C _{NO(on)} C _{NC(on)}		Room		403		Pi
Power Supply			•				
Power Supply Range	V+			1.8		5.5	V
Power Supply Current	l+	V _{IN} = 0 or V+	Full			1.0	μΑ

- a. Room = 25 °C, Full = as determined by the operating suffix.
 b. Typical values are for design aid only, not guaranteed nor subject to production testing.
- c. The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this data sheet. d. Guarantee by design, nor subjected to production test.
- e. V_{IN} = input voltage to perform proper function.


Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Vishay Siliconix


TYPICAL CHARACTERISTICS $T_A = 25 \, ^{\circ}\text{C}$, unless otherwise noted




 $r_{\mbox{\scriptsize ON}}$ vs. $V_{\mbox{\scriptsize COM}}$ and Supply Voltage



r_{ON} vs. Analog Voltage and Temperature (NC1)



Supply Current vs. Temperature




Supply Current vs. Input Switching Frequency

300

250

200

150



100 Leakage Current (pA) $I_{NO(off)},\ I_{NC(off)}$ 50 0 - 50 - 100 - 150 I_{COM(off)} - 200 - 250 - 300 0.0 0.5 1.0 1.5 2.0 2.5 3.0 V_{COM} - Analog Voltage (V)

V+ = 3.0 V


Leakage vs. Analog Voltage


I_{COM(on)}







TYPICAL CHARACTERISTICS $T_A = 25$ °C, unless otherwise noted










Insertion Loss, Off-Isolation, Crosstalk vs. Frequency




Charge Injection vs. Analog Voltage

Vishay Siliconix


VISHAY.

TEST CIRCUITS



C_L (includes fixture and stray capacitance)





Logic "1" = Switch On Logic input waveforms inverted for switches that have the opposite logic sense.

Figure 1. Switching Time



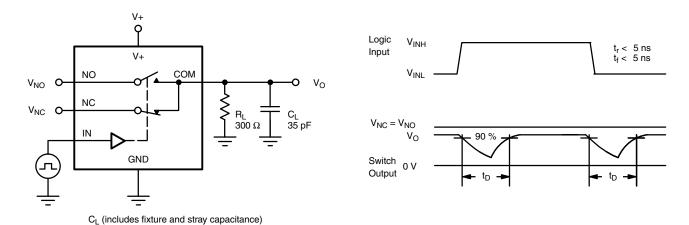


Figure 2. Break-Before-Make Interval





IN depends on switch configuration: input polarity determined by sense of switch.

Figure 3. Charge Injection



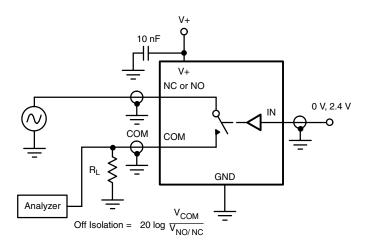


Figure 4. Off-Isolation

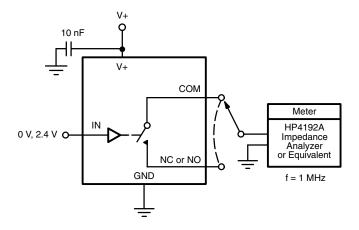


Figure 5. Channel Off/On Capacitance

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package/tape drawings, part marking, and reliability data, see http://www.vishay.com/ppg?72742.



Vishay

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Revision: 18-Jul-08

Document Number: 91000 www.vishay.com