

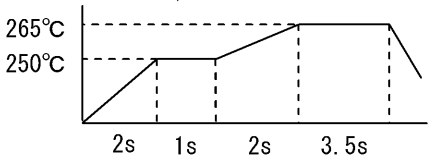





APPLICABLE STANDARD					
RATING	OPERATING TEMPERATURE RANGE	-55 °C TO 85 °C ⁽¹⁾	STORAGE TEMPERATURE RANGE	-10 °C TO 60 °C ⁽²⁾	
	VOLTAGE	100 V AC ⁽³⁾	OPERATING HUMIDITY RANGE	40 % TO 80 %	
	CURRENT	0.5 A ⁽³⁾	STORAGE HUMIDITY RANGE	40 % TO 70 % ⁽²⁾	
	APPLICABLE CABLE	AWG 36,40 THIN COAXIAL CABLE			
SPECIFICATIONS					
ITEM	TEST METHOD	REQUIREMENTS	QT	AT	
CONSTRUCTION					
GENERAL EXAMINATION	VISUALLY AND BY MEASURING INSTRUMENT.	ACCORDING TO DRAWING.	x	x	
MARKING	CONFIRMED VISUALLY.		x	x	
ELECTRIC CHARACTERISTICS					
CONTACT RESISTANCE	20 mV MAX, 1 mA(DC OR 1000Hz)	80 mΩ MAX. ⁽⁴⁾	x		
INSULATION RESISTANCE	100 V DC.	500 MΩ MIN.	x		
VOLTAGE PROOF	300 V AC FOR 1 min.	NO FLASHOVER OR BREAKDOWN.	x		
MECHANICAL CHARACTERISTICS					
INSERTION AND WITHDRAWAL FORCES	MEASURED BY APPLICABLE CONNECTOR.	INSERTION FORCE: 30.6 N MAX. WITHDRAWAL FORCE: 2.55 N MIN.	x		
MECHANICAL OPERATION	50 TIMES INSERTIONS AND EXTRACTIONS.	① CONTACT RESISTANCE: 100 mΩ MAX. ⁽⁴⁾ ② NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	x		
VIBRATION	FREQUENCY 10 TO 55 Hz, SINGL AMPLITUDE : 0.76 mm, AT 2 h FOR 3 DIRECTION.	① NO ELECTRICAL DISCONTINUITY OF 1 μs. ② NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	x		
SHOCK	490 m/s ² , DURATION OF PULSE 11 ms AT 3 TIMES FOR 3 DIRECTIONS.		x		
LOCK STRENGTH	MATE TO APPLICABLE CONNECTOR AND APPLY PULL FORCE HORIZONTALLY.	30 N MIN.	x		
ENVIRONMENTAL CHARACTERISTICS					
DAMP HEAT (STEADY STATE)	EXPOSED AT 40±2 °C, 90 ~ 95 %, 96 h.	① CONTACT RESISTANCE: 100 mΩ MAX. ⁽⁴⁾ ② INSULATION RESISTANCE: 500 MΩ MIN. ③ NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	x		
DRY HEAT	EXPOSED AT 85±2 °C, 96 h		x		
RAPID CHANGE OF TEMPERATURE	TEMPERATURE -55→+5~+35→+85→+5~+35°C TIME 30→ 5 MAX→ 30→ 5 MAX min. UNDER 5 CYCLES.		x		
CORROSION SALT MIST	EXPOSED IN 5 % SALT WATER SPRAY FOR 48 h.	① CONTACT RESISTANCE: 100 mΩ MAX. ⁽⁴⁾	x		
SULFUR DIOXIDE	EXPOSED IN 25 PPM FOR 96 h. (TEST STANDARD: JIS C 60068) 	② DEFECT SUCH AS CORROSION WHICH IMPAIRS THE FUNCTION OF CONNECTOR. 	x		
RESISTANCE TO SOLDERING HEAT	1)SOLDERING HEAT WELDER : PRESSURIZATION:15±2N HEATING:265±5°C, 3.5±0.5 sec  2) SOLDERING IRONS : 360°C MAX. FOR 3 sec.	NO DEFORMATION OF CASE OF EXCESSIVE LOOSENESS OF THE TERMINAL.	x		
SOLDERABILITY	SOLDERED AT SOLDER TEMPERATURE 240±3°C FOR IMMERSION DURATION, 3 sec.	A NEW UNIFORM COATING OF SOLDER SHALL COVER A MINIMUM OF 95 % OF THE SURFACE BEING IMMERSERD.	x		
	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
	2	DIS-F-001895	KN. SHIBUYA	HT. YAMAGUCHI	07. 04. 24
REMARKS ⁽¹⁾ INCLUDE TEMPRERATURE RISE CAUSED BY CURRENT-CARRYING. ⁽²⁾ "STORAGE" MEANS A LONG-TERM STORAGE STATE FOR THE UNUSED PRODUCT BEFORE ASSEMBLY TO PCB. ⁽³⁾ IT IS THE MAXIMUM VALUE OF CONNECTOR. CONFIRM THE SPECIFICATION OF THE CABLE. ⁽⁴⁾ NOT INCLUDE CONDUCTOR RESISTANCE OF CABLE.			APPROVED	HS. OKAWA	07. 04. 02
			CHECKED	HT. YAMAGUCHI	07. 04. 02
			DESIGNED	KN. SHIBUYA	07. 03. 30
Unless otherwise specified, refer to JIS-C-5402.			DRAWN	KN. SHIBUYA	07. 03. 30
Note QT:Qualification Test AT:Assurance Test X:Applicable Test			DRAWING NO.		ELC4-156669-00
	SPECIFICATION SHEET		PART NO.	FX15S-51P-0. 5SD	
	HIROSE ELECTRIC CO., LTD.		CODE NO.	CL575-2118-5-00	 1/1